

User Manual

Model Number: W22

I. Product Overview



1. Set Button
2. Mode Button
3. ADJ Button
4. Light Button
5. Hour
6. Minute

7. Second
8. Date
9. Week Day

II. Local Time Setup

TEKMAGIC

2.1 In the local time display mode, hold down the SET button till you see the second digit is blinking, then press the ADJ button to clear the second digit or you could skip to the next step.



2.2 Press the MODE button once, you will see the hour digit starts blinking, then press the ADJ button to set the hour.



2.3 Press the MODE button once again, you will see the minute digit starts blinking, then press the ADJ button to set the minute.



2.4 Press the MODE button once again, you will see the month digit starts blinking, then press the ADJ button to set the month.



2.5 Press the MODE button once again, you will see the date digit starts blinking, then press the ADJ button to set the date.




TEKMAGIC


2.7 Press the MODE button once again, you will see the week day digit starts blinking, then press the ADJ button to choose the week day.



2.8 Press the MODE button once again, you will see the hour format digit indicator starts blinking, then press the ADJ button to choose 12 or 24 hours format.

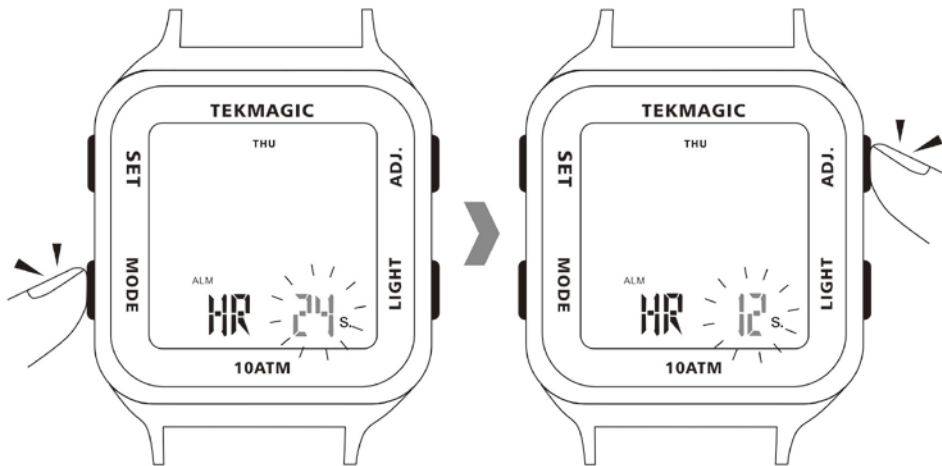

2.9 Press the SET button once to save all the settings, the watch will back to the local time display mode.

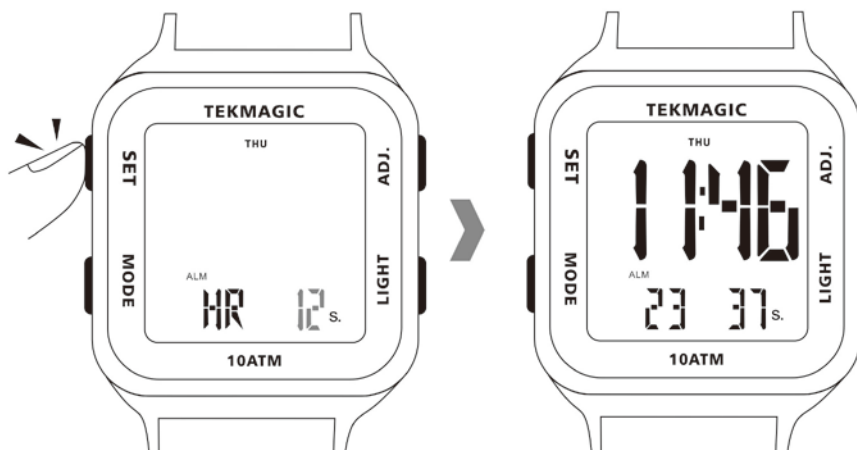


III. Stopwatch Mode


3.1 In the local time display mode, press the MODE button once to enter into stopwatch mode.




3.2 Press the ADJ button to start timing.

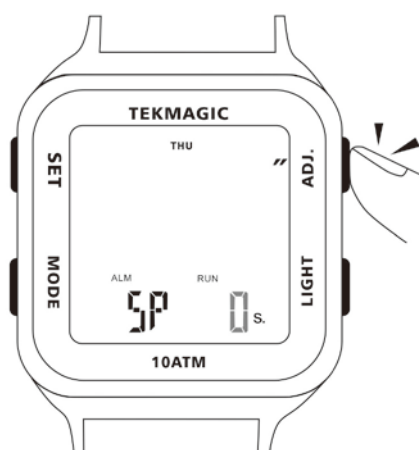

3.3 Press the ADJ button again to stop timing.

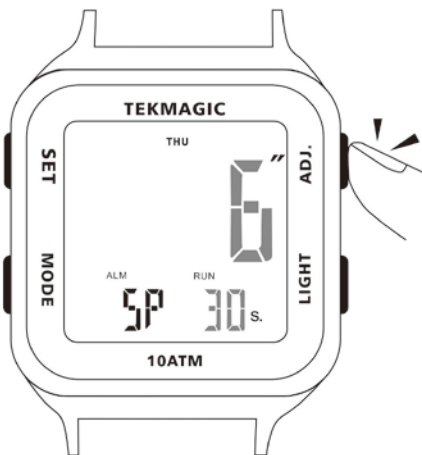

3.4 Press the SET button to clear.

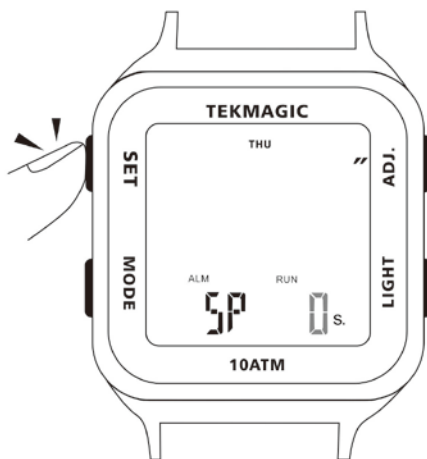

3.5 Press the MODE button once to exit the stopwatch mode.



<Note>:

- 1. The stopwatch timing range is 0'00"00 to 23:59'59".*
- 2. If you don't stop the timing, the stopwatch will continue to timing and start timing from 0'0"00 even the timing is over 24 hours and you have exited the stopwatch mode.*

IV. Alarm

4.1 Set an alarm

4.1.1 In the local time display mode, press the MODE button twice to enter into alarm setting mode.



4.1.2 Hold down the SET button till you see the hour digit is blinking, then press the ADJ button to set the hour.



4.1.3 Press the MODE button once, you will see the minute digit starts blinking, then press the ADJ button to set the minute.



4.1.4 Press the MODE button once again, you will see the time zone digit indicator starts

TEKMAGIC

blinking, then press the ADJ button to select the time zone. **Note: L1 is the alarm for your local time zone, L2 is the alarm for the other time zone.**



4.1.5 Press the SET button to save the setting.



4.1.6 Press the MODE button once to exit the alarm setting mode.



4.2 Turn On/Off Alarm

In the alarm setting mode, press the ADJ button to turn on or turn off the alarm.



<Note>:

1. The alarm sound would last for 20 seconds.
2. You could press any buttons on the watch to stop the alarm sound.
3. The alarm is defaulted set for everyday.

V. Turn On/Off Hourly Chime Function

In the alarm setting mode, press the ADJ button to turn on/off the hourly chime function.



VI. Timer Countdown

6.1 In the local time display mode, press the MODE button for 3 times to enter into timer countdown mode.



6.2 Hold down the SET button till you see the hour digit is blinking, then press the ADJ button to set the hour.



6.3 Press the MODE button once, you will see the minute digit starts blinking, then press the ADJ button to set the minute.



6.4 Press the MODE button once again, you will see the second digit starts blinking, then press the ADJ button to set the second.




6.5 Press the SET button once to save the setting.



6.6 Press the ADJ button to start count down.



6.7 Press the ADJ button again to stop count down.

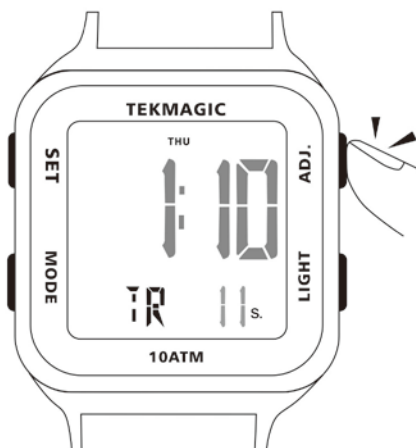

6.8 Press the MODE button once to exit the timer countdown.



<Note>: When the countdown is ended, the watch will sound for 10 seconds and then return to the start.

VII. Back Light

Press the LIGHT button to turn on the electro luminescent backlight. The backlight will be turned off automatically in about 3 seconds.



VIII. Time Setup for the Other Time Zone

8.1 In the local time display mode, press the MODE button for 4 times to enter into the other time zone display mode.




8.2 Hold down the SET button till you see the hour digit is blinking, press the ADJ button to set the hour.



8.3 Press the MODE button once, you will see the minute digit starts blinking, then press the ADJ button to set the minute.



8.4 Press the SET button to save the setting.

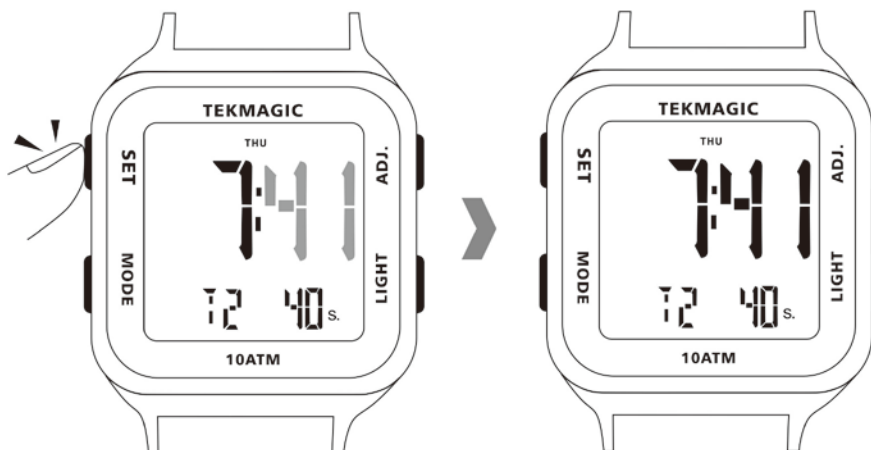

8.5 Press the MODE button once to exit the other time zone display mode.



IX. Month and Date Check

In the local time display mode, hold down the ADJ button to check the month and date



X. Check the Current Time in the Other Time Zone

In the local time display mode, press the MODE button for 4 times to check the current time in the other time zone



<The End>

